


tappo elettrosaldabile

cod. 21.36 PE 100

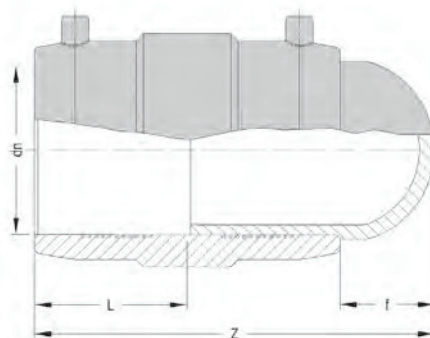

diam. d _n	SALDABILITÀ su tubo/raccordo PE 100				
	SDR 26	SDR 17	SDR 11	SDR 9	SDR 7,4
20			● ▲	● ▲	●
25			● ▲	●	●
32		● ▲	●	●	●
40		● ▲	●	●	●
50		●	●	●	●
63		●	●	●	●
75		●	●	●	●
90		●	●	●	●
110		●	●	●	●
125		●	●	●	●
140		●	●	●	●
160	●	●	●	●	●
180		●	●	●	●

● saldabile solo con saldatrici monovalenti Serie Euro

▲ minimo spessore saldabile 3 mm

VALIDO solo per versione PN 25 - SDR 7,4

d _n	dimensioni PN 16 - SDR 11			dimensioni PN 25 - SDR 7,4			pesi	
	f	L	Z	f	L	Z	SDR 11 PN 16	SDR 7,4 PN 25
20				30	33	100		60
25				27	33	104		75
32	31	38	98	31	38	98	95	100
40	29	44	114	29	44	114	140	155
50	32	49	127	32	49	127	205	250
63	49	55	136	49	55	136	310	360
75	41	61	162	41	60	164	430	550
90	42	66	174	52	65	164	680	850
110	49	70	189	61	70	187	1075	1400
125	42	76	194	42	76	198	1440	1800
140	51	82	214	51	81	207	1900	2400
160	48	86	220	45	86	211	2535	3300
180	50	100	249				3635	●
200							●	●

● a richiesta

✓ ASSOLUTAMENTE obbligatoria la raschiatura del tubo

✓ Saldabilità garantita su tubazioni in PE 80 e PE 100



Raccordi
elettro-
saldabili